380 SKIM COAT BASE GREY

Cementitious Base Skim Coat



PRODUCT DESCRIPTION

A1-Mix Skim Coat Mortar Grey 380 is a polymer modified, cement-based skim coat designed for smooth and durable interior wall finishes. It provides excellent workability and adhesion, resulting in a fine and consistent surface ready for painting or futher apply A1-Mix 388 Fine Grey.

SMOOTH FINISH

EXCELLENT ADHESION

DURABLE & LONG LASTING

GOOD WORKABILITY

Colour:

Grey

Packaging:



40kg per bag

Quality Management

ISO 9001:2015 Certified by SIRIM

RECOMMENDED APPLICATIONS

- Brick & Block Walls
- Cement Plastered Walls
- Concrete Surfaces
- Interior & Exterior Wall Finishes

TECHNICAL DATA

Product Type	Polymer-modified, cement based skim coat mortar
Colour	Grey
Binder	Cement
Filler	Graded Silica Sand
Additive	Cellulose-based additive to improve workability and adhesion
Maxinum Aggregate Size	0.425mm (approximately 40 mseh)
pH	9 ~ 10
Bulk Density	1.70 ± 0.15 Kg /L
Adhesion to Concrete	≥ 1.00 ± 0.10 N/mm² after 28 days at 30°C
Pot Life	Approximately 3-4 hours mininum

ADDITIONAL INFORMATION


Recommanded Thickness	2-3 mm per coat
Mixing Water	Approximately 9L per 40kg bag
Packaging	40kg/ bag
Shelf Life	6 months from date of manufacture in unopened original packaging, when stored correctly

COVERAGE GUIDE

Thickness (mm)	Coverage (kg/m²)
2 mm	2.4 - 3.0
3 mm	3.6 - 4.5

Coverage may vary depending on surface condition and application method.

APPLICATION PROCEDURES

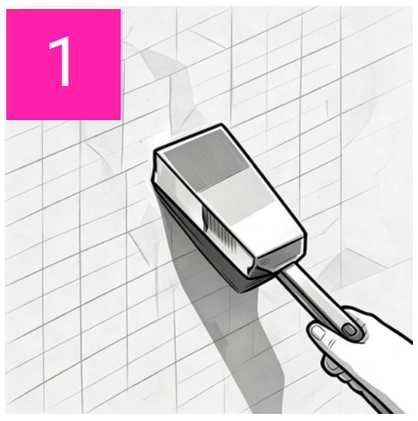

SURFACE PREPARATION

- Remove dust, oil, grease and foreign materials.
- Dampen the surface which is high water absorbent.




MIXING

- Add 9 Liter of clean water with per 40kg bag.
- Mix with electric mixer to a homogeneous paste.



APPLICATION

- Apply A1-Mix 380 on prepared surface by spray machine.
- Ensure even and consistent thickness (2-3mm per coat).

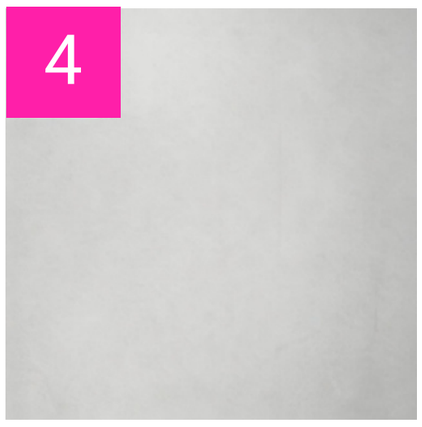

FINISHING

- Smoothen or level out with steel spatula on wall or ceiling.
- Allow to cure before painting or futher decoration.

APPLICATION CONDITIONS


Do not apply in extreme temperature conditions.

Protect from direct sunlight, wind and rain.

Do not apply on excessively wet surface.

Do not apply on unsound or contaminated substrates.

STORAGE & SHELF LIFE



Store in a cool, dry place, off the ground and away from direct sunlight.



Keep bags tightly closed and properly stacked.




Shelf life in 6 months from the date of manufacture in unopened original packaging.


SAFETY & PRECAUTIONS



Wear suitable personal protective equipment (gloves, dust mask and eye protection).

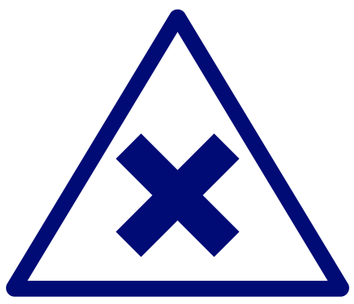

Avoid contact with skin and eyes, Avoid inhaling dust.



Refer to the latest Safety Data Sheet(SDS) for detailed information

IMPORTANT NOTICE

The information contained in this Technical Data Sheet is based on our current knowledge, laboratory testing and practical experience.Actual performance may vary depending on substrate condition,application method, environmental conditions and workmanship.

Users are responsible for determining the suitability of the product for the intended application and should refer to the latest version of this Technical Data Sheet before use.